

The Discrete Fréchet Gap

Omrit Filtser and Matthew J. Katz

Ben-Gurion University of the Negev
Beer-Sheva 84105, Israel
{omritna,matya}@cs.bgu.ac.il

Abstract. We introduce the *discrete Fréchet gap* and its variants as an alternative measure of similarity between polygonal curves. We believe that for some applications the new measure (and its variants) may better reflect our intuitive notion of similarity than the discrete Fréchet distance (and its variants), since the latter measure is indifferent to (matched) pairs of points that are relatively close to each other. Referring to the frogs analogy by which the discrete Fréchet distance is often described, the discrete Fréchet gap is the minimum difference between the longest and shortest positions of the leash needed for the frogs to traverse their point sequences.

We present an optimization scheme, which is suitable for any monotone function defined for pairs of distances such as the gap and ratio functions. We apply this scheme to two variants of the discrete Fréchet gap, namely, the *one-sided discrete Fréchet gap with shortcuts* and the *weak discrete Fréchet gap*, to obtain $O(n^2 \log^2 n)$ -time algorithms for computing them.

1 Introduction

Polygonal curves play an important role in many applied areas, such as 3D modeling in computer vision, map matching in GIS, and protein backbone structural alignment and comparison in computational biology. Given two curves in a metric space, it is a challenging task to compare them in a way that will reflect our intuitive notion of resemblance. Various similarity measures have been suggested and investigated, each of them has its advantages and disadvantages. The Fréchet distance is a useful and well studied similarity measure that has been applied in many fields of research and applications.

The *Fréchet distance* is often described by an analogy of a man and a dog connected by a leash, each walking along a curve from its starting point to its end point. Both the man and the dog can control their speed but they are not allowed to backtrack. The Fréchet distance between the two curves is the minimum length of a leash that is sufficient for traversing both curves in this manner.

Intuitively, the *discrete Fréchet distance* replaces the curves by two sequences of points $A = (a_1, \dots, a_n)$ and $B = (b_1, \dots, b_n)$, and replaces the man and dog by two frogs (connected by a leash), the *A-frog* and the *B-frog*, initially placed at a_1 and b_1 , respectively. At each move, the *A-frog* or the *B-frog* (or both) jumps from its current point to the next one. The frogs are not allowed to backtrack. We are

interested in the minimum length of a leash that allows the A -frog and the B -frog to reach a_n and b_n , respectively. The discrete Fréchet distance is considered a good approximation of the continuous distance, and is easier to compute.

Much research has been done on the Fréchet distance, the majority of which considers only the continuous version. However, sometimes the discrete Fréchet distance is more appropriate. For example, in computational biology where each vertex of the polygonal curves represents an alpha-carbon atom. Applying the continuous Fréchet distance in this case will result in mapping of arbitrary points (i.e., interior points on the edges of the curves), which is not meaningful biologically. See, e.g., [1] for a collection of references on the Fréchet distance and its applications.

In many of the application domains using the Fréchet distance, the curves or the sampled sequences of points are generated by physical sensors, such as GPS devices. These sensors may generate inaccurate measurements, which we refer to as *outliers*. Several variants of the Fréchet distance exist for measuring similarity between curves that might be partially erroneous. In particular, variants for handling outliers have been proposed, since the Fréchet distance is a bottleneck (min-max) measure and is very sensitive to outliers. Among these variants are the Fréchet distance with shortcuts [1,5,6], the partial Fréchet similarity [4], and the average and summed Fréchet distance [3,7].

In the *one-sided discrete Fréchet distance with shortcuts*, we allow the A -frog to jump to any point that comes later in its sequence, rather than just to the next point. The B frog has to visit all the B points in order, as in the standard discrete Fréchet distance problem.

We suggest a new variant of the discrete Fréchet distance — the *discrete Fréchet gap*. Returning to the frogs analogy, in the discrete Fréchet gap the leash is elastic and its length is determined by the distance between the frogs. When the frogs are at the same location, the length of the leash is zero. The rules governing the jumps are the same, i.e., traverse all the points in order, no backtracking. We are interested in the minimum *gap* of the leash, i.e., the minimum difference between the longest and shortest positions of the leash needed for the frogs to jump from their start points to their end points.

While the discrete Fréchet distance is determined by the (matched) pairs of points that are very far from each other and is indifferent towards (matched) pairs of points that are very close to each other, the discrete Fréchet gap measure is sensitive to both. In some cases (though not always), this sensitivity results in better reflection of reality; see Figure 1 for examples.

For handling outliers, we suggest the *one-sided discrete Fréchet gap with shortcuts* variant, which we believe has several advantages. Comparing to the one-sided discrete Fréchet distance with shortcuts, we believe that the gap variant better reflects the intuitive notion of resemblance between curves in the presence of outliers. Figure 2 depicts two curves that look similar, except for a single outlier, with small Fréchet gap with shortcuts and large Fréchet distance with shortcuts. Also notice that the gap variant gives a better matching of the points.

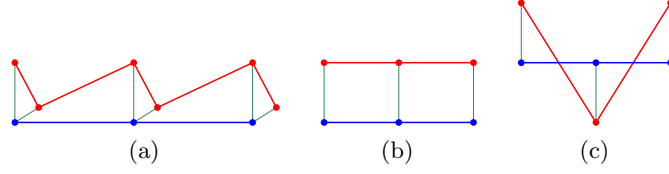


Fig. 1: Fréchet gap vs. Fréchet distance: (a) Two non-similar curves, with a large gap. (b) Two similar looking curves. The gap is very small while the Fréchet distance remains the same as in (a). (c) Two non-similar curves, with a small gap and a large Fréchet distance.

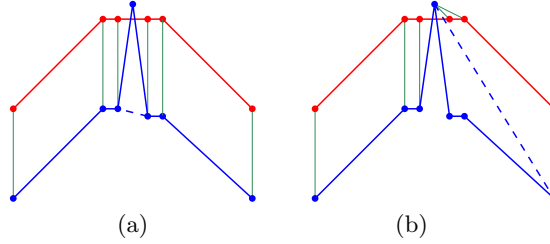


Fig. 2: (a) The 1-sided Fréchet gap with shortcuts is small and the outlier is ignored. (b) The 1-sided Fréchet distance with shortcuts is large and the outlier is matched.

Avraham et al. [1] showed that the decision version of the one-sided discrete Fréchet distance with shortcuts can be solved in linear time, using a greedy algorithm. This algorithm can also be used for solving the decision version of the gap variant. In this paper, we present an efficient optimization algorithm for computing the one-sided discrete Fréchet gap with shortcuts, which exploits the greediness of the decision algorithm.

Other variants of the discrete Fréchet distance have corresponding meaningful gap variants. For example, the *weak discrete Fréchet distance* in which the frogs are allowed to jump also backwards to the previous point in their sequence. The decision version for this variant can also be solved with a greedy algorithm (in quadratic time), and we show how to apply our optimization scheme to efficiently compute the *weak discrete Fréchet gap*. In general, our scheme can be applied to any variant of the discrete Fréchet gap that has an efficient greedy decision algorithm.

Notice that the number of potential gaps is $O(n^4)$, while the number of potential distances is only $O(n^2)$. Nevertheless, our algorithms for computing the the one-sided discrete Fréchet gap with shortcuts and the weak discrete Fréchet gap run in $O(n^2 \log^2 n)$ time.

Finally, our scheme can be used for computing the *discrete Fréchet ratio* (and its variants), in which we are interested in the minimum ratio between the longest and the shortest positions of the leash. More generally, one can replace the gap function with any other function g defined for pairs of distances, provided

that it is monotone, i.e., for any four distances $c \leq a \leq b \leq d$, it holds that $g(a, b) \leq g(c, d)$.

2 Preliminaries

Let $A = (a_1, \dots, a_n)$ and $B = (b_1, \dots, b_n)$ be two sequences of points. We define a directed graph $G = G(A \times B, E = E_A \cup E_B \cup E_{AB})$, whose vertices are all the possible positions of the two frogs, and whose edges are all the possible moves between positions: $E_A = \left\{ \left((a_i, b_j), (a_{i+1}, b_j) \right) \right\}$, $E_B = \left\{ \left((a_i, b_j), (a_i, b_{j+1}) \right) \right\}$, $E_{AB} = \left\{ \left((a_i, b_j), (a_{i+1}, b_{j+1}) \right) \right\}$.

The set E_A corresponds to moves where only the A -frog jumps forward, the set E_B corresponds to moves where only the B -frog jumps forward, and the set E_{AB} corresponds to moves where both frogs jump forward. Notice that any valid sequence of moves of the two frogs (with unlimited leash length) corresponds to a path in G from (a_1, b_1) to (a_n, b_n) , and vice versa.

It is likely that not all positions in $A \times B$ are valid; for example, when the leash is short. We thus assume that we are given an indicator function $f : A \times B \rightarrow \{0, 1\}$, which determines for each position whether it is valid or not. Now, we say that a position (a_i, b_j) is a *reachable position* (w.r.t. f), if there exists a path P in G from (a_1, b_1) to (a_i, b_j) , consisting of only valid positions, i.e., for each position $(a_k, b_l) \in P$, it holds that $f(a_k, b_l) = 1$.

For any distance $\delta \geq 0$, the function f_δ is defined as follows:

$$f_\delta(a_i, b_j) = \begin{cases} 1, & d(a_i, b_j) \leq \delta \\ 0, & \text{otherwise} \end{cases},$$

where $d(a_i, b_j)$ denotes the Euclidean distance between a_i and b_j . The *discrete Fréchet distance* $d_{dF}(A, B)$ is the smallest $\delta \geq 0$ for which (a_n, b_n) is a reachable position w.r.t. f_δ .

For any range of distances $[s, t]$, $0 \leq s \leq t$, the function $f_{[s, t]}$ is defined as follows:

$$f_{[s, t]}(a_i, b_j) = \begin{cases} 1, & s \leq d(a_i, b_j) \leq t \\ 0, & \text{otherwise} \end{cases}.$$

A range $[s, t]$, $s \leq t$, is a *feasible (Fréchet) range* if (a_n, b_n) is a reachable position w.r.t. $f_{[s, t]}$.

Let g be a bivariate real function with the following monotonicity property: for any four non-negative real numbers $c \leq a \leq b \leq d$, it holds that $g(a, b) \leq g(c, d)$. Then, the *discrete Fréchet range w.r.t. g* is the smallest $\delta = g(s, t)$ for which $[s, t]$ is a feasible range. Two especially important instances are the discrete Fréchet range w.r.t. $t - s$, which we name the *discrete Fréchet gap* and denote by $d_{FG}(A, B)$, and the discrete Fréchet range w.r.t. t/s , which we name the *discrete Fréchet ratio* and denote by $d_{FR}(A, B)$.

In the following sections, we use the difference function $t - s$ as a representative function through which we present our ideas and results. However, these results are valid for any such function g (and in particular for the function t/s).

One-sided shortcuts variants. Let f be an indicator function. We say that a position (a_i, b_j) is an *s-reachable position* (w.r.t. f), if there exists a path P in G from (a_1, b_1) to (a_i, b_j) , such that $f(a_1, b_1) = 1$, $f(a_i, b_j) = 1$, and for each b_l , $1 < l < j$, there exists a position $(a_k, b_l) \in P$ that is valid (i.e., $f(a_k, b_l) = 1$). We call such a path an *s-path*. In general, an s-path consists of both valid and non-valid positions. Consider the path P' (not in G) that is obtained from P by deleting the non-valid positions. Then P' corresponds to a sequence of moves of the two frogs, where the A-frog is allowed to skip points in A , and with a leash satisfying f . Since in any path in G the two indices (of the A-points and of the B-points) are monotonically non-decreasing, it follows that in P' the B-frog visits each of the points $b_1, \dots, b_j$, in order, while the A-frog visits only a subset of the points $a_1, \dots, a_i$, in order.

The *discrete Fréchet distance with one-sided shortcuts* $d_{dF}^S(A, B)$ is the smallest $\delta \geq 0$ for which (a_n, b_n) is an s-reachable position w.r.t. f_δ .

Similarly, a range $[s, t]$ is a *feasible (Fréchet) range with one-sided shortcuts* if (a_n, b_n) is an s-reachable position w.r.t. $f_{[s, t]}$, and the *discrete Fréchet gap with one-sided shortcuts* $d_{FG}^S(A, B)$ is the smallest $\delta = t - s \geq 0$ for which $[s, t]$ is a feasible range with one-sided shortcuts.

Weak variants. Let $G' = G(A \times B, E')$ be the graph obtained from G by adding all backward edges to E , i.e., $E' = E \cup \{(v, u) | (u, v) \in E\}$. We say that a position (a_i, b_j) is a *w-reachable position* (w.r.t. f), if there exists a path P in G' from (a_1, b_1) to (a_i, b_j) consisting of only valid positions. Such a path corresponds to a sequence of moves of the two frogs, with a leash satisfying f , and when backtracking is allowed.

The *weak discrete Fréchet distance* $d_{dF}^w(A, B)$ is the smallest $\delta \geq 0$ for which (a_n, b_n) is a w-reachable position w.r.t. f_δ .

Similarly, a range $[s, t]$ is a *feasible weak (Fréchet) range* if (a_n, b_n) is a w-reachable position w.r.t. $f_{[s, t]}$, and the *weak discrete Fréchet gap* $d_{FG}^w(A, B)$ is the smallest $\delta = t - s \geq 0$ for which $[s, t]$ is a feasible weak range.

3 Computing the discrete Fréchet gap

Observe that for any feasible (Fréchet) range $[s, t]$, it holds that $t \geq d_{dF}(A, B)$ and $s \leq \min\{d(a_1, b_1), d(a_n, b_n)\}$. Moreover, since we are interested in the minimum feasible range, we may restrict our attention to ranges whose limits are distances between points of A and points of B . (Otherwise, we can increase the lower limit and decrease the upper limit until they become such ranges.) Thus, we can search for the minimum feasible range using the following sorted array of distances:

$$D = (d_m^{\min}, \dots, d_1^{\min} = \min\{d(a_1, b_1), d(a_n, b_n)\}, \dots, d_{dF}(A, B) = d_1^{\max}, \dots, d_k^{\max})$$

One can compute the discrete Fréchet gap $d_{FG}(A, B)$ in $O(n^4)$ time and $O(n^2)$ space, by using the standard $O(n^2)$ decision procedure. Start with the range $[s, t] = [d_m^{\min}, d_1^{\max}]$, and as long as the current range is not a feasible range increase t (by moving to the next distance in D). Now, increase s (by moving to the next distance in D) and, again, as long as the current range is not a feasible

range increase t . Repeat the last step (i.e., increase s by a single move and t by a sequence of moves) as much as needed. Finally, return the minimum feasible range that was found during this process.

A recent result of Ben-Avraham, Kaplan and Sharir [2] enables us to reduce the running time to $O(n^3)$. Given sequences A and B and an indicator function f , they construct a dynamic data structure in $O(n^2)$ time (which also stores the information whether (a_n, b_n) is a reachable position). Following a single change in f (i.e., some valid position becomes non-valid or vice versa), the data structure can be updated in $O(n)$ time. Thus, after increasing s or t by moving to the next distance in D , we can determine in $O(n)$ time (instead of $O(n^2)$ time) whether $[s, t]$ is a feasible range, since by increasing s a single position becomes non-valid and by increasing t a single position becomes valid.

4 Computing the discrete Fréchet gap with one-sided shortcuts

We present an algorithm for computing the discrete Fréchet gap with one-sided shortcuts in $O(n^2 \log^2 n)$ time. Due to space limitations, the proofs of Lemmas 1-3 have been moved to Appendix B.

4.1 The decision procedure

Let $[s, t]$, $0 \leq s \leq t$ be a range. We would like to determine whether $[s, t]$ is a feasible (Fréchet) range with one-sided shortcuts, i.e., whether (a_n, b_n) is an s -reachable position w.r.t. $f_{[s, t]}$. In this section, we present a linear-time algorithm for doing so, i.e., for solving the decision version. Our algorithm is actually much more general and works for any indicator function f . It is similar to the algorithm of Ben-Avraham et al. [1] for the decision version of the discrete Fréchet distance with one-sided shortcuts.

Let f be an indicator function, such that $f(a_i, b_j)$ can be evaluated in constant time, for any position (a_i, b_j) . Algorithm 1 computes an s -path in G from (a_1, b_1) to (a_n, b_n) , if such a path exists. In particular, it determines whether (a_n, b_n) is an s -reachable position w.r.t. f . Informally, the B-frog jumps forward (one point at a time) as long as possible, while the A-frog stays in place, then the A-frog makes the smallest forward jump needed to allow the B-frog to continue. The frogs continue advancing in this way, until they either reach (a_n, b_n) or get stuck.

The running time of Algorithm 1 is clearly $O(n)$, since the number of iterations of the while loop is at most $2n - 1$. Notice that we do not construct the graph $G = G(A \times B, E = E_A \cup E_B \cup E_{AB})$, but the path P produced by the algorithm is a path in G . Actually, P is a path in $G(A \times B, E = E_A \cup E_B)$, since the algorithm does not advance the frogs simultaneously. We will use this observation later. The correctness of the algorithm is given by the following lemma.

Lemma 1. *Given two sequences of points $A = (a_1, \dots, a_n)$ and $B = (b_1, \dots, b_n)$ and an indicator function f , $dF1S\text{-}decision(A, B, f)$ returns “yes” iff (a_n, b_n) is an s -reachable position in $G = G(A \times B, E = E_A \cup E_B \cup E_{AB})$ w.r.t. f .*

Since we did not make any assumptions regarding the function f , Algorithm 1 can be used as the decision procedure for both the discrete Fréchet distance with one-sided shortcuts and the discrete Fréchet gap with one-sided shortcuts: given a real number $\delta \geq 0$ or an interval $[s, t]$, we simply replace f by f_δ or $f_{[s,t]}$, respectively.

Algorithm 1 dF1S-decision(A, B, f)

1. If $f(a_1, b_1) = 0$ or $f(a_n, b_n) = 0$ return “no”.
 2. $curr \leftarrow (a_1, b_1)$.
 3. While *true*
 - Assume $curr$ is (a_i, b_j) .
 - $P \leftarrow curr$.
 - If** $curr$ is valid ($f(curr) = 1$)
 - If** $j < n$, set $curr \leftarrow (a_i, b_{j+1})$
(the B-frog jumps to its next point b_{j+1} , while the A-frog stays at a_i).
 - Else** ($j = n$) return “yes”
(the A-frog can jump directly to a_n , while the B-frog is already at b_n).
 - Else** ($curr$ is non-valid, i.e., $f(curr) = 0$)
 - If** $i < n$, set $curr \leftarrow (a_{i+1}, b_j)$
(the A-frog skips a_i , while the B-frog stays at b_j).
 - Else** ($i = n$) return “no” (the frogs cannot reach position (a_n, b_n)).
-

4.2 The search algorithm

Consider the following sorted distances array:

$$D = (d_m^{\min}, \dots, d_1^{\min} = \min\{d(a_1, b_1), d(a_n, b_n)\}, \dots, d_{dF}^S(A, B) = d_1^{\max}, \dots, d_k^{\max}).$$

For any feasible range $[s, t]$ with one-sided shortcuts, it holds that $t \geq d_{dF}^S(A, B)$ and $s \leq \min\{d(a_1, b_1), d(a_n, b_n)\}$. As in Section 3, we may restrict our attention to ranges whose limits are distances between points of A and points of B .

For the rest of this section, whenever we refer to a feasible range, we actually mean a feasible range with one-sided shortcuts.

Let M be the matrix whose rows correspond to $d_1^{\min}, \dots, d_m^{\min}$ and whose columns correspond to $d_1^{\max}, \dots, d_k^{\max}$ (see Figure 3). A cell $M_{i,j}$ of the matrix corresponds to the range $[d_i^{\min}, d_j^{\max}]$. M is sorted in the sense that range $M_{i,j}$ contains all the ranges $M_{i',j'}$ with $i' \leq i, j' \leq j$. Thus, we can perform a binary search in the middle row to find the smallest feasible range $M_{\frac{m}{2},j} = [d_{\frac{m}{2}}^{\min}, d_j^{\max}]$ among the ranges in this row.

$M_{\frac{m}{2},j}$ induces a partition of M into 4 submatrices: M_1, M_2, M_3, M_4 (see Figure 3). Each of the ranges in M_1 is contained in a range of the middle row which is not a feasible range, hence none of

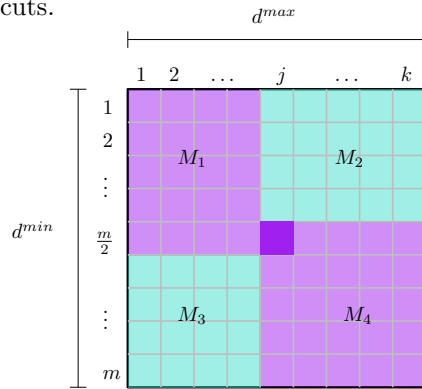


Fig. 3: The matrix of possible gaps.

the ranges in M_1 is a feasible range. Each of the ranges in M_4 contains $M_{\frac{m}{2},j}$ and hence is at least as large as $M_{\frac{m}{2},j}$. Thus, we may ignore M_1 and M_4 and focus only on the ranges in the submatrices M_2 and M_3 .

Sketch of the algorithm. Our goal is to find the smallest range in M for which the decision algorithm returns “yes”. This can be done in $O(n^3 \log n)$ time by first finding in each of M ’s rows (via binary search) the smallest range for which the decision algorithm returns “yes”, and then picking the smallest among these $O(n^2)$ ranges. Below, we sketch a nearly quadratic algorithm for finding the smallest feasible range.

We perform a recursive search in the matrix M . The input to the recursive algorithm is a submatrix M' of M and a graph G' by which one can decide for each range in M' whether it is a feasible range or not. In each recursive call, we perform a binary search in the middle row of M' to find the smallest feasible range in this row, using the graph G' . Then, we construct the two graphs for the two submatrices of M' in which we still need to search in the next level of the recursion.

Notice that we could use the graph $G = G(A \times B, E = E_A \cup E_B)$ in each of the recursive calls, but this would yield an algorithm of running time $O(n^3 \log n)$. Instead, in each recursive call we use a graph whose size is proportional to the number of rows and columns in the submatrix for this call. The introduction of these graphs and their efficient construction is the main contribution of this section.

We represent M and its submatrices by the indices of the array D that correspond to the rows and columns of M . For example, we represent M by $[1, m] \times [1, k]$, M_1 by $[1, \frac{m}{2}] \times [1, j-1]$, M_2 by $[1, \frac{m}{2}-1] \times [j, k]$, M_3 by $[\frac{m}{2}+1, m] \times [1, j-1]$, and M_4 by $[\frac{m}{2}, m] \times [j, k]$.

The skeleton of the algorithm is given below. Recall that g is a bivariate real function with the property that for any four non-negative real numbers $c \leq a \leq b \leq d$, it holds that $g(a, b) \leq g(c, d)$ (see Section 2). In our case, $g(s, t) = t - s$.

Algorithm 2 S-Alg($M_{[p,p'] \times [q,q']}$, $G_{[p,p'] \times [q,q']}$)

1. Perform a binary search in the middle row of matrix $M_{[p,p'] \times [q,q']}$ to find the smallest feasible range $[d_i^{\min}, d_j^{\max}]$, $i = \frac{p'+p-1}{2}$, using the decision procedure with the graph $G_{[p,p'] \times [q,q']}$.
2. Construct the graphs $G_{[p,i-1] \times [j,q']}$ and $G_{[i+1,p'] \times [q,j-1]}$ for the submatrices $M_{[p,i-1] \times [j,q']}$ and $M_{[i+1,p'] \times [q,j-1]}$, respectively.
3. Return

$$\begin{aligned} & \min\{g(d_j^{\max}, d_i^{\min}), \\ & \quad \text{S-Alg}(M_{[p,i-1] \times [j,q]}, G_{[p,i-1] \times [j,q]}), \\ & \quad \text{S-Alg}(M_{[i+1,p'] \times [q,j-1]}, G_{[i+1,p'] \times [q,j-1]})\}. \end{aligned}$$

The number of potential feasible ranges is equal to the number of cells in M , which is $O(n^4)$. But, since we are looking for the smallest feasible range,

we do not need to generate all of them. We only use M to illustrate the search algorithm, its cells correspond to the potential feasible ranges, but do not contain any values. We thus define the *size* of a submatrix of M by the sum of its number of rows and number of columns, for example, M is of size $m + k$, M_2 is of size $\frac{m}{2} + k - j$, and M_3 is of size $\frac{m}{2} + j - 1$.

Notice that the ranges in M_2 and M_3 consist of all the ranges that intersect $g = [d_{\frac{m}{2}}^{\min}, d_j^{\max}]$ and are neither contained in g nor contain g : M_2 consists of all the ranges with minimum distance larger than $d_{\frac{m}{2}}^{\min}$ and maximum distance at least as large as $d_j^{\max}$, and M_3 consists of all the ranges with minimum distance smaller than $d_{\frac{m}{2}}^{\min}$ and maximum distance smaller than $d_j^{\max}$. This implies that for *any* range in M_2 , all the distances in $[d_1^{\min}, d_j^{\max}]$ are in the range and all the distances in $[d_m^{\min}, d_{\frac{m}{2}}^{\min}]$ are not in the range (see Figure 4).

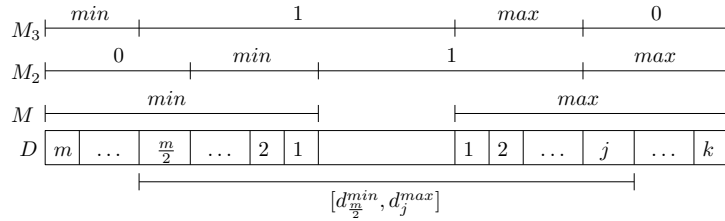


Fig. 4: The concept of fixed values.

More generally, let M' be any of the submatrices associated with the i 'th level of the recursion tree. A distance $d \in D$ is *fixed* w.r.t. M' if one of the following two statements is correct:

- (i) d belongs to all the ranges in M' , or
- (ii) d does not belong to any of the ranges in M' .

Otherwise, d is *non-fixed* (w.r.t. M'). The non-fixed distances w.r.t. M' are thus the distances that correspond to the rows and to the columns of M' (see Figure 4).

Lemma 2. *The total size of the matrices in level i of the recursion tree is at most $m + k$, for any level i .*

It follows that the number of non-fixed distances in each level of the recursion is at most $m + k$. We wish to use this fact to reduce the running time of our algorithm.

4.3 The construction of the graphs

Let $d_{i,j}$ denote the distance between a_i and b_j . We say that distance d *belongs* to submatrix M' of M (and write $d \in M'$) if d is one of the distances corresponding to the rows and columns of M' .

We first construct the graph $G = G(V = A \times B, E = E_A \cup E_B)$. Each vertex $v_{i,j} = (a_i, b_j) \in V$ has two outgoing edges:

1. $jumpB(v_{i,j}) = v_{i,j+1}$ (and if $j = n$, $jumpB(v_{i,j}) = v_{n,n}$), and
2. $jumpA(v_{i,j}) = v_{i+1,j}$ (and if $i = n$, $jumpA(v_{i,j}) = null$).

Then, we construct the graph G_0 for the matrix $M_0 = M$ from G , by removing the vertices of G whose corresponding distances are fixed w.r.t. M_0 (these are all the distances between $d_1^{\min}$ and $d_1^{\max}$ in the array D), and updating the edge set as described below.

In general, let M_{i-1} and G_{i-1} , $i > 0$, be a matrix in level $i - 1$ and the graph constructed for it; then $V_{i-1} = \{v_{i,j} \mid d_{i,j} \in M_{i-1}\} \cup \{v_{1,1}, v_{n,n}\}$. Let M_i be one of the two submatrices of M_{i-1} in level i . We describe how G_i is obtained from G_{i-1} (and how G_0 is obtained from G). Some of the vertices of G_{i-1} are *fixed* w.r.t. G_i , i.e., their corresponding distances are fixed w.r.t. M_i (i.e., they do not belong to M_i). We say that such a fixed vertex v (whose corresponding distance is d) is *valid* (resp., *non-valid*), if d belongs to all ranges in M_i (resp., if d does not belong to any of the ranges in M_i). Since backtracking is forbidden, G_{i-1} is acyclic and one can topologically sort its vertices. We do so, and then process the vertices, one by one, in reverse order (i.e., from last to first). More precisely, for each vertex $v \in V_{i-1}$, we run the code fragment below, where d is the distance corresponding to v . The code fragment sets the pointer $next(v)$, for each fixed vertex $v \in V_{i-1}$, so that $next(v)$ is the first non-fixed vertex in the path (in G_{i-1}) beginning at v that is induced by the greedy decision algorithm.

```

set  $next(v_{n,n}) \leftarrow v_{n,n}$ 
if  $v$  is fixed and  $v \neq v_{n,n}$ 
    if  $v$  is valid ( $f_{[s,t]}(v) = 1$  for all ranges  $[s,t] \in M_i$ )
        if  $jumpB(v)$  is fixed,  $next(v) \leftarrow next(jumpB(v))$ 
        if  $jumpB(v)$  is not fixed,  $next(v) \leftarrow jumpB(v)$ 
    if  $v$  is non-valid ( $f_{[s,t]}(v) = 0$  for all ranges  $[s,t] \in M_i$ )
        if  $jumpA(v)$  is fixed,  $next(v) \leftarrow next(jumpA(v))$ 
        if  $jumpA(v)$  is non-fixed,  $next(v) \leftarrow jumpA(v)$ 
if  $v$  is non-fixed or  $v = v_{1,1}$ 
    if  $jumpB(v)$  is fixed,  $jumpB(v) \leftarrow next(jumpB(v))$  (else, do nothing)
    if  $jumpA(v)$  is fixed,  $jumpA(v) \leftarrow next(jumpA(v))$  (else, do nothing)

```

Notice that after processing all the vertices of G_{i-1} , it holds that (i) for any fixed vertex $v \neq v_{n,n}$, $next(v)$ is non-fixed, and (ii) for any non-fixed vertex v , $jumpB(v)$ and $jumpA(v)$ are also non-fixed (unless maybe when $jumpB(v) = v_{n,n}$ or $jumpA(v) = v_{n,n}$). We thus set $V_i = V_{i-1} \setminus \{v \in V_{i-1} \mid v \text{ is fixed w.r.t. } M_i\}$ and $v \neq v_{1,1}, v_{n,n}\} = \{v_{i,j} \mid d_{i,j} \in M_i\} \cup \{v_{1,1}, v_{n,n}\}$ and define G_i as the graph induced by V_i . See Figure 5 for an example.

Given a range $[s, t]$ corresponding to the matrix M_i , we can apply the decision procedure to the graph G_i : If both the distances corresponding to $v_{1,1}$ and to $v_{n,n}$, respectively, are within the range (i.e., $f_{[s,t]}(v_{1,1}) = 1$ and $f_{[s,t]}(v_{n,n}) = 1$), then perform the following loop (otherwise, return “no”). Let v be the current vertex (where initially $v = v_{1,1}$). If v is valid (i.e., if $f_{[s,t]}(v) = 1$), go to $jumpB(v)$, else go to $jumpA(v)$. Return “yes” if and only if you have reached $v_{n,n}$. This takes only $O(|V_i|)$ time.

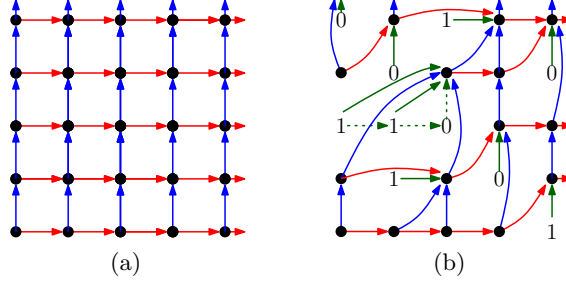


Fig. 5: (a) The graph G_0 . (b) A graph that was constructed from G_0 in level 1 of the recursion tree. The points represent the vertices of the graphs (all non-fixed). The 1's (resp., the 0's) are the vertices of G_0 that are fixed valid (resp., fixed non-valid) w.r.t. to the new graph. The green arrows mark $next()$, the red ones mark $jumpB()$, and the blue ones mark $jumpA()$. The new graph consists only of the points and the red and blue arrows.

Correctness. It remains to prove that the decision obtained when applying the decision procedure to G_i is the same as the one obtained when applying it to the original graph G .

Lemma 3. *Given a range $[s, t]$ corresponding to M_i , the decision algorithm applied to G_i returns “yes” if and only if the decision algorithm applied to G returns “yes”.*

Running time. Consider the recursion tree. It consists of $O(\log n)$ levels, where the i 'th level is associated with 2^i disjoint submatrices of the matrix M . Level 0 is associated with the matrix $M_0 = M$, level 1 is associated with the submatrices M_2 and M_3 of M (see Figure 3), etc.

A *range test* is a test that determines for two distances $d_1 < d_2$ in the sorted array of distances D whether the range $[d_1, d_2]$ is a feasible range. In the i 'th level we perform $O(\log n)$ range tests in each of the 2^i submatrices associated with this level. We claim that the total time spent on the i 'th level is $O(n^2 \log n)$. This bound includes the preparations towards the next level. Therefore, the running time of the entire algorithm is $O(n^2 \log^2 n)$.

We now focus on the analysis of the i 'th level. Let M' be any of the submatrices associated with the i 'th level. Our algorithm guarantees that the cost of a range test, for a range corresponding to M' , is linear in the size of M' . By Lemma 2, the total size of the submatrices in level i is $m + k \leq n^2$, and therefore the total cost of all range tests performed in the i 'th level is $O(n^2 \log n)$. Finally, the preparations towards the next level require only $O(n^2)$ time.

The following theorem summarizes the main result of this section.

Theorem 1. *Let $A = (a_1, \dots, a_n)$ and $B = (b_1, \dots, b_n)$ be two sequences of points. Then, the discrete Fréchet gap with one-sided shortcuts $d_{FG}^S(A, B)$ and*

the discrete Fréchet ratio with one-sided shortcuts $d_{FR}^S(A, B)$ can be computed in $O(n^2 \log^2 n)$ time.

5 Computing the weak discrete Fréchet gap

We apply the high-level search algorithm to the weak discrete Fréchet gap variant. For this we need to (i) describe a suitable greedy decision algorithm and (ii) show how to efficiently construct the graphs for the two submatrices of the next level. Due to space limitations, we only briefly discuss (i); full details of both (i) and (ii) (which is the key issue here) are given in Appendix A.

Let $G' = G(A \times B, E')$, where $E' = E_A \cup E_B \cup \{(v, u) \mid (u, v) \in E_A \cup E_B\}$. That is, G' is obtained from the graph G of the ‘strong’ version, by adding the backward edges. (For simplicity, we assume in this section that the frogs are not allowed to jump simultaneously.) Notice that G' is a planar graph. We view G' as a maze. Each vertex is a room with four doors, one for each outgoing edge, that lead to the adjacent rooms (see Figure 6). A man standing in room (a_1, b_1) wants to reach room (a_n, b_n) , but without entering forbidden rooms (i.e., rooms corresponding to non-valid positions).

A well known algorithm for traversing a maze is the *wall-follower* rule (also known as the right-hand rule): keep your right hand in contact with a wall of the maze throughout the motion. The algorithm guarantees that you will eventually reach the exit, if possible. Thus, one can find in $O(n^2)$ time a weak-path in G' from (a_1, b_1) to (a_n, b_n) , if such a path exists (or reach (a_1, b_1) if no such path exists).

The following theorem summarizes the main result of this section.




Fig. 6: Following the walls.

Theorem 2. Let $A = (a_1, \dots, a_n)$ and $B = (b_1, \dots, b_n)$ be two sequences of points. Then, the weak discrete Fréchet gap $d_{FG}^w(A, B)$ and the weak discrete Fréchet ratio $d_{FR}^w(A, B)$ can be computed in $O(n^2 \log^2 n)$ time.

References

1. R. Ben Avraham, O. Filtser, H. Kaplan, M. J. Katz, and M. Sharir. The discrete Fréchet distance with shortcuts via approximate distance counting and selection. In *Proc. 30th Sympos. Comput. Geom.*, page 377, 2014.
2. R. Ben Avraham, H. Kaplan, and M. Sharir. A faster algorithm for the discrete Fréchet distance under translation. *CoRR*, abs/1501.03724, 2015.
3. S. Brakatsoulas, D. Pfoser, R. Salas, and C. Wenk. On map-matching vehicle tracking data. In *Proc. 31st Internat. Conf. Very Large Data Bases*, pages 853–864, 2005.
4. K. Buchin, M. Buchin, and Y. Wang. Exact algorithms for partial curve matching via the Fréchet distance. In *Proc. 20th ACM-SIAM Sympos. Discrete Algorithms*, pages 645–654, 2009.

5. M. Buchin, A. Driemel, and B. Speckmann. Computing the Fréchet distance with shortcuts is NP-hard. In *Proc. 30th Sympos. Comput. Geom.*, page 367, 2014.
6. A. Driemel and S. Har-Peled. Jaywalking your dog: Computing the Fréchet distance with shortcuts. *SIAM J. Computing*, 42(5):1830–1866, 2013.
7. A. Efrat, Q. Fan, and S. Venkatasubramanian. Curve matching, time warping, and light fields: New algorithms for computing similarity between curves. *J. Mathematical Imaging and Vision*, 27(3):203–216, 2007.

A Computing the weak discrete Fréchet gap

In this section we apply the high-level search algorithm (i.e., Algorithm 2) to the problem of computing the weak discrete Fréchet gap. For this we need to (i) describe a suitable greedy decision algorithm and (ii) show how to efficiently construct the graphs for the two submatrices of the next level. For simplicity, we assume in this section that the frogs are not allowed to jump simultaneously, however, our solution can be easily adapted to the case where simultaneous jumps are allowed.

A.1 The decision procedure

Let $G' = G(A \times B, E')$, where $E' = E_A \cup E_B \cup \{(v, u) | (u, v) \in E_A \cup E_B\}$. That is, G' is obtained from the graph G of the ‘strong’ version, which contains only the forward edges, by adding the backward edges. Let $f : A \times B \rightarrow \{0, 1\}$ be an indicator function, which determines for each position whether it is valid or not. We provide an $O(n^2)$ -algorithm for finding a weak-path in G' (if exists), i.e., a path in G' from (a_1, b_1) to (a_n, b_n) that consists of forward and possibly also backward edges.

We describe the weak-path finding algorithm through an analogy to maze traversal. Notice that G' is a planar graph. We view G' as a maze. Each vertex is a room with four doors, one for each outgoing edge, that lead to the adjacent rooms. For a room (a_i, b_j) , the north and south doors lead to rooms (a_{i+1}, b_j) and (a_{i-1}, b_j) , respectively, and the east and west doors lead to (a_i, b_{j+1}) and (a_i, b_{j-1}) , respectively. All doors are closed, but some are locked and some are unlocked. More precisely, a door is unlocked if and only if the rooms on both its sides correspond to valid positions.

A well known algorithm for traversing a maze is the *wall-follower* rule (also known as the right-hand rule): keep your right hand in contact with a wall of the maze throughout the motion. The algorithm guarantees that you will eventually reach the exit, if possible. (In our setting, whenever our hand encounters an unlocked door, we go through it as if the wall ended at the door.) The wall-follower rule works only for simply connected mazes, i.e., where all the walls of the maze are connected to the outer boundary of the

maze, either directly or indirectly through other walls. In our setting, there might be rooms that are not connected to the outer boundary (when considering graphs for submatrices), but the rule will still work, since the starting and ending points are on the boundary.

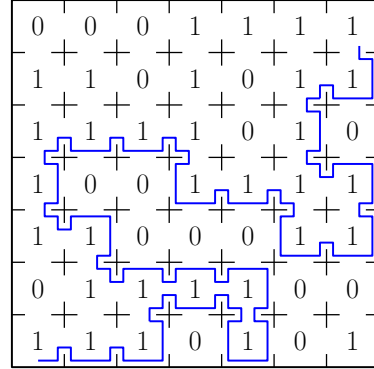


Fig. 7: Following the walls (right-hand rule).

Returning to the maze analogy, we would like to replace the doors leading to fixed 0-rooms by walls (we already know they are locked), and to remove the doors between pairs of adjacent fixed 1-rooms (we already know they are open). By removing doors we get larger rooms with more than four outgoing doors, but for each way of entering such a large room, there is exactly one way to exit it, using the wall-follower rule. So each incoming edge can be replaced by an edge directly to the next non-fixed room. Notice that if the large room has holes in it, they can be ignored since the maze's exit is in the north-east corner and thus cannot be in the interior of a large room.

G_i is constructed from G_{i-1} as follows:

1. Delete all edges (u, v) such that u is a non-fixed room and v is a fixed 0-room.
2. Let G'_{i-1} be the graph induced by the fixed 1-rooms. For each connected component C of G'_{i-1} :
 - Let $v_{k,l}$ be any east-most room in C . Clearly, this room is adjacent to the outer boundary of C (i.e., to the outer boundary of the union of the rooms in C).
 - Starting from the eastern wall of room $v_{k,l}$, use the wall-follower rule to traverse the outer boundary of C . For each visited room v , let $next(v)$ be the first non-fixed room that would follow v if we were walking in the graph G_{i-1} (using the wall-follower rule); see Figure 8.
3. For each edge (u, v) such that u is a non-fixed room and v is a fixed 1-room, replace (u, v) by $(u, next(v))$.
4. Finally, delete all the fixed rooms.

Running time. Computing G'_{i-1} and its connected components can be done in $O(|G_{i-1}|)$ time using a DFS algorithm. For each connected component C , finding its outer boundary can be done in time linear in the size of C , using the wall-follower rule. Finding $next(v)$ for each visited fixed 1-room v can be done by walking along the outer boundary in the opposite direction. All the other steps require time linear in the size of G_{i-1} . We conclude that G_i can be constructed in $O(|G_{i-1}|)$ time.

Correctness. The following lemma is analogous to Lemma 6.

Lemma 4. *Given a range $[s, t]$ corresponding to M_i , let Π_{i-1} be the path traced by the decision algorithm in G_{i-1} . Let v_k and v_l be two vertices in Π_{i-1} , such that v_k and v_l are non-fixed w.r.t. G_i but all the vertices between them are fixed w.r.t. G_i . Let u be the successor of v_k in Π_{i-1} . Then,*

- if $u = north(v_k)$ in G_{i-1} , then $north(v_k) = v_l$ in G_i .
- if $u = east(v_k)$ in G_{i-1} , then $east(v_k) = v_l$ in G_i .
- if $u = south(v_k)$ in G_{i-1} , then $south(v_k) = v_l$ in G_i .
- if $u = west(v_k)$ in G_{i-1} , then $west(v_k) = v_l$ in G_i .

Lemma 5. *For a given range $[s, t]$, the decision algorithm applied to G_i returns “yes” if and only if the decision algorithm applied to G' returns “yes”.*

Proof. As in Lemma 3, the proof is by induction on i , the level of the recursion. Assume that the lemma is true for G_{i-1} . Let Π_{i-1} be the path traced by the decision algorithm in G_{i-1} . Consider the path Π_i that is obtained from Π_{i-1} by removing all the vertices that are fixed w.r.t. G_i . We claim that the decision algorithm applied to G_i follows the path Π_i . Indeed, for any two consecutive vertices v_k and v_{k+1} in Π_i , let u be the successor of v_k in Π_{i-1} . By Lemma 4, if $u = \text{north}(v_k)$ in G_{i-1} then $\text{north}(v_k) = v_{k+1}$ in G_i , and the same holds for $\text{east}(v_k)$, $\text{south}(v_k)$ and $\text{west}(v_k)$. So Π_i is a path in G_i and moreover, since the decision algorithm makes only local decisions depending on which direction it has currently chosen, it will follow the same path in G_i .

Now, let v_q be the last vertex in Π_{i-1} . If the decision algorithm on G_{i-1} returns “yes”, then $v_q = v_{n,n}$ and the decision algorithm on G_i returns “yes” as well. If, on the other hand, the decision algorithm on G_{i-1} returns “no”, then $v_q = v_{1,1}$ and the decision algorithm on G_i will also return “no”.

B Missing proofs

Lemma 1. *Given two sequences of points $A = (a_1, \dots, a_n)$ and $B = (b_1, \dots, b_n)$ and an indicator function f , $\text{dF1S-decision}(A, B, f)$ returns “yes” iff (a_n, b_n) is an s-reachable position in $G = G(A \times B, E = E_A \cup E_B \cup E_{AB})$ w.r.t. f .*

Proof. It is easy to see that if the algorithm returns “yes” then P is an s-path (in G) from (a_1, b_1) to (a_n, b_n) and hence (a_n, b_n) is an s-reachable position in G .

Assume now that (a_n, b_n) is an s-reachable position in G . (Then, in particular, $f(a_1, b_1) = 1$ and $f(a_n, b_n) = 1$.) We now prove that if a position $v = (a_i, b_j)$ is an s-reachable position in G , then there exists a position $v' = (a_{i'}, b_j) \in P$, $i' \leq i$, such that $f(v') = 1$. In particular, since (a_n, b_n) is an s-reachable position in G , there exists a position $(a_{i'}, b_n) \in P$ such that $f(a_{i'}, b_n) = 1$, and when this position becomes the current position the algorithm returns “yes”.

We prove this claim by induction on j . The base case where $j = 1$ is trivial, since $(a_1, b_1) \in P$. Let Π be an s-path from (a_1, b_1) to $v = (a_i, b_{j+1})$. Let $u = (a_k, b_j)$, $k \leq i$, be a position in Π such that $f(u) = 1$. u is an s-reachable position in G , so by the induction hypothesis there exists a vertex $v' = (a_{i'}, b_j) \in P$, $i' \leq k$, such that $f(a_{i'}, b_j) = 1$. After adding v' to P , the algorithm sets $\text{curr} \leftarrow (a_{i'}, b_{j+1})$. If $f(\text{curr}) = 1$, then we are done. Else $f(\text{curr}) = 0$ and the algorithm increases i' until $\text{curr} = (a_{i'+l}, b_{j+1})$, for some $l \geq 1$, and $f(\text{curr}) = 1$. Since $f(v) = 1$, we conclude that $i' + l \leq i$, and the claim follows.

Lemma 2. *The total size of the matrices in level i of the recursion tree is at most $m + k$, for any level i .*

Proof. By induction on the level. The only matrix in level 0 is M , and $|M| = m + k$. Let M' be a matrix in level $i - 1$, and assume the size of M' is $p + q$ (it has p rows and q columns). In level i we perform a binary search in the middle row of M' to find the smallest feasible range $[d_{\frac{p}{2}}^{\min}, d_j^{\max}]$ in this row. It is easy to see that the resulting two submatrices are of sizes $\frac{p}{2} + q - j$ and $\frac{p}{2} + j - 1$, respectively, which sums to $p + q - 1$.

B.1 The construction of the graphs in Section 4 - correctness proof

We assume below that both the distances corresponding to $v_{1,1}$ and to $v_{n,n}$, respectively, are within the range, since otherwise the claim is clearly true.

Lemma 6. *Given a range $[s, t]$ corresponding to M_i , let Π_{i-1} be the path traced by the decision algorithm in G_{i-1} . Let v_k and v_l be two vertices in Π_{i-1} , such that v_k and v_l are non-fixed w.r.t. G_i but all the vertices between them are fixed w.r.t. G_i . Then in G_i , $\text{jump}B(v_k) = v_l$, if $f_{[s,t]}(v_k) = 1$, and $\text{jump}A(v_k) = v_l$, if $f_{[s,t]}(v_k) = 0$.*

Proof. First, observe that if v_l immediately follows v_k in Π_{i-1} , then the lemma is clearly true, so let $u_1, \dots, u_p$ be the vertices between v_k and v_l . We show by induction that for any $1 \leq j \leq p$, $\text{next}(u_j) = v_l$. For $j = p$, if u_p is fixed valid, then by the decision algorithm $v_l \leftarrow \text{jump}B(u_p)$ and by the code fragment $\text{next}(u_p) = \text{jump}B(u_p) = v_l$. If, on the other hand, u_p is fixed non-valid, then by the decision algorithm $v_l = \text{jump}A(u_p)$ and by the code fragment $\text{next}(u_p) \leftarrow \text{jump}A(u_p) = v_l$. For $j < p$, if u_j is valid, then by the decision algorithm $u_{j+1} = \text{jump}B(u_j)$ and by the code $\text{next}(u_j) \leftarrow \text{next}(\text{jump}B(u_j)) = \text{next}(u_{j+1})$, but by the induction hypothesis $\text{next}(u_{j+1}) = v_l$, so we get $\text{next}(u_j) = v_l$. If, on the other hand, u_j is non-valid, then by the decision algorithm $u_{j+1} = \text{jump}A(u_j)$ and by the code and the induction hypothesis $\text{next}(u_j) \leftarrow \text{next}(\text{jump}A(u_j)) = \text{next}(u_{j+1}) = v_l$.

Now, if $f_{[s,t]}(v_k) = 1$, then by the decision algorithm $u_1 = \text{jump}B(v_k)$ and by the code $\text{jump}B(v_k) \leftarrow \text{next}(\text{jump}B(v_k)) = \text{next}(u_1) = v_l$, and, if $f_{[s,t]}(v_k) = 0$, then by the decision algorithm $u_1 = \text{jump}A(v_k)$ and by the code $\text{jump}A(v_k) \leftarrow \text{next}(\text{jump}A(v_k)) = \text{next}(u_1) = v_l$.

Notice that Lemma 6 remains true when $v_k = v_{1,1}$, even if $v_{1,1}$ is fixed w.r.t. G_i , and when $v_l = v_{n,n}$, even if $v_{n,n}$ is fixed w.r.t. G_i .

Lemma 3. *Given a range $[s, t]$ corresponding to M_i , the decision algorithm applied to G_i returns “yes” if and only if the decision algorithm applied to G returns “yes”.*

Proof. By induction on i , the level of the recursion. We omit the proof for G_0 (i.e., that the decision on G_0 is the same as the one on G), since it is essentially identical to the proof of the general case. We thus assume that the lemma is true for G_{i-1} (i.e., that the decision on G_{i-1} is the same as the one on G), and prove that it is also true for G_i .

Let Π_{i-1} be the path traced by the decision algorithm in G_{i-1} . Consider the path Π_i that is obtained from Π_{i-1} by removing all the vertices that are fixed w.r.t. G_i (except for $v_{1,1}$, and $v_{n,n}$, even if they are fixed w.r.t. G_i). We claim that the decision algorithm applied to G_i follows the path Π_i . Indeed, by Lemma 6, for any two consecutive vertices v_k and v_{k+1} in Π_i , if $f_{[s,t]}(v_k) = 1$ then $\text{jump}B(v_k) = v_{k+1}$ and if $f_{[s,t]}(v_k) = 0$ then $\text{jump}A(v_k) = v_{k+1}$, so Π_i is a path in G_i and moreover it is followed by the decision algorithm in G_i .

Now, let v_q be the last vertex in Π_{i-1} . If the decision algorithm on G_{i-1} returns “yes”, then $v_q = v_{n,n}$ and the decision algorithm on G_i returns “yes”

as well. If, on the other hand, the decision algorithm on G_{i-1} returns “no”, then $v_q \neq v_{n,n}$ and it holds that either $f_{[s,t]}(v_q) = 1$ and $jumpB(v_q) = null$ or $f_{[s,t]}(v_q) = 0$ and $jumpA(v_q) = null$. If v_q is non-fixed w.r.t. G_i , then by the code fragment $jumpB(v_q)$ and $jumpA(v_q)$ do not change and the decision algorithm on G_i returns “no” in this case. If v_q is fixed w.r.t. G_i , then by the code fragment $next(v_q) = null$. Let v_l denote the last vertex in G_{i-1} that is non-fixed w.r.t. G_i (i.e., v_l is the last vertex in Π_i). Arguing as in the proof of Lemma 6, we get that (in G_i) if $f_{[s,t]}(v_l) = 1$ then $jumpB(v_l) = null$ and if $f_{[s,t]}(v_l) = 0$ then $jumpA(v_l) = null$, thus the decision algorithm on G_i returns “no” also in this case.